



The WSP is Exclusively
Distributed by EPG Pumps
1800 351 755
www.weirselfprimer.com.au



Patent Pending

Pump Size	10"x10" • 250 mm x 250 mm ANSI/DIN
Pump Casing	Ductile Iron
Operating Pressure	Maximum 120 psi (797 kPa)
Impeller	Open type, two vane. Material - Cast steel Pumps 3" (76.2 mm) solids
Impeller Shaft	17-4PH SST
Wear Plate, Replaceable	Front: Hi Chrome (minimum 600 Brinnell) Rear: Hardened Steel (minimum 400 Brinnell)
Clean-out	Removable - Ductile Iron
Flap Valve	Neoprene with steel reinforcing ring
Bearing Housing	Ductile Iron
Seal Plate	Hi Chrome (minimum 600 Brinnell)
Shaft Sleeve	17-4PH SST
Radial Bearing	Open single ball
Thrust Bearing	Open double ball
Bearing/Seal Cavity Lubrication	SAE No. 30 oil
Suction Flange	125# Ductile Iron ANSI or DIN
Gaskets	Buna-N, compressed synthetic fibers, vegetable fiber, PTFE, cork, and rubber
O-Rings	Buna-N
Hardware	Steel Grade 5/316SST


Optional Equipment and Materials

Hi-Chrome, CD4MCU. Automatic air release valve, 120V/240V casing heater. High pump temperature shutdown kit, moisture probe, gauge kit, NPT & DIN standard suction and discharge flanges. Other elastomers available.


Seal Specifications

Mechanical oil-lubricated, double floating, self-aligning seal. Silicon Carbide rotation and stationary faces. Stainless steel metal components. Maximum temperature of liquid pumped 180°F/83°C.

Note: Consult factory for applications exceeding maximum pressure and/or temperature indicated.

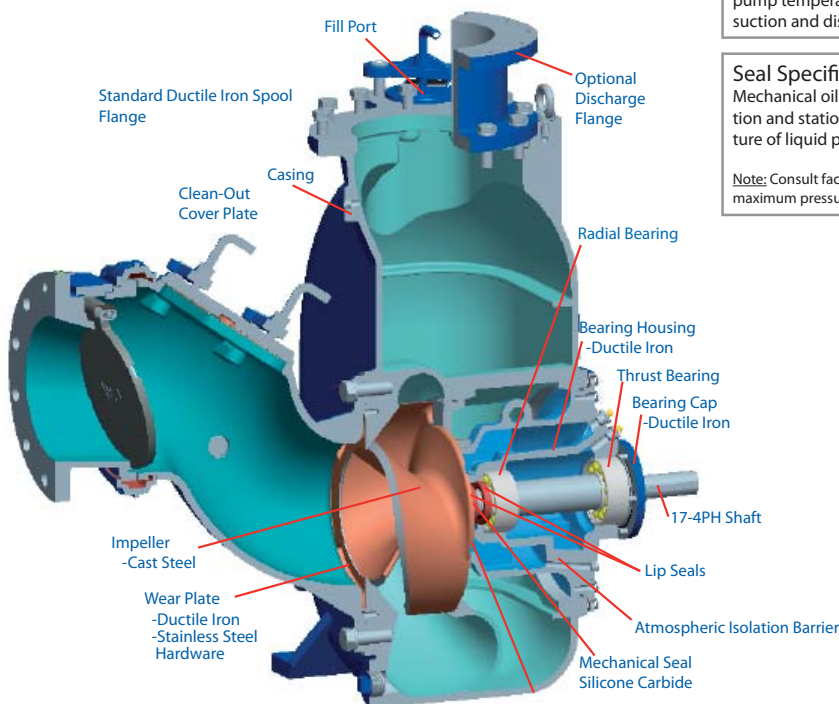

Seal Detail View

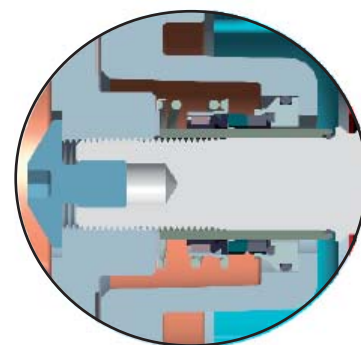



Pump Size	10"x10"/254mm x254mm
Net Weight	1600 lbs./726 KG.
Shipping Weight	1660 lbs./753 KG
Export Crate	53 Ft ³ / 1.5 M ³

