



The WSP is Exclusively Distributed by




## 8" Pump WSP8A

No Tools Required For Clearance Adjustment



Patent Pending

### WEMCO® Self-Primer™ Pump Details

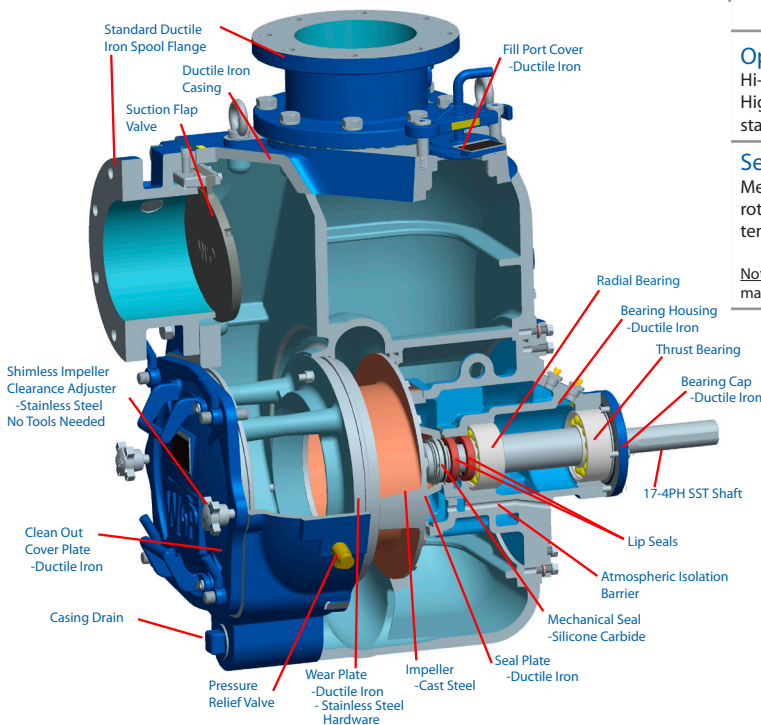

Pump Size	8"x8" • 200 mm x 200 mm ANSI/DIN
Pump Casing	Ductile Iron
Operating Pressure	Maximum 120 psi (797 kPa)
Impeller	Open type, two vane Material - cast steel Pumps 3" (76.2 mm) solids
Impeller Shaft	17-4PH SST
Wear Plate, Replaceable	Ductile iron
Cover Plate	Removable/adjustable ductile iron 30
Flap Valve	Neoprene with steel reinforcing ring
Bearing Housing	Ductile iron
Seal Plate	Ductile iron
Shaft Sleeve	17-4PH SST
Radial Bearing	Open single ball
Thrust Bearing	Open double ball
Bearing/Seal Cavity Lubrication	SAE No. 30 oil
Flanges	125# Ductile iron ANSI or DIN
Gaskets	Buna-N, compressed synthetic fibers, vegetable fiber, PTFE, cork, and rubber
O-Rings	Buna-N
Hardware	Plated steel/Grade 8/SST
Pressure Release Valve	Brass
Oil Level Sight Gauges	Bearing and seal cavity
Net Weight	1300 lbs./590 KG
Shipping Weight	1400 lbs./635 KG
Export Crate	48 Ft <sup>3</sup> /1.4 M <sup>3</sup>

#### Optional Equipment and Materials


Hi-Chrome, CD4MCu. Automatic air release valve, 120V/240V casing heater. High pump temperature shutdown kit, moisture probe, gauge kit, NPT & DIN standard suction and discharge flanges. Other elastomers available.

#### Seal Specifications

Mechanical oil-lubricated, double floating, self-aligning seal. Silicone Carbide rotation and stationary faces. Stainless steel metal components. Maximum temperature of liquid pumped 180°F/83°C.

**Note:** Consult factory for applications exceeding maximum pressure and/or temperature indicated.

#### Seal Detail View

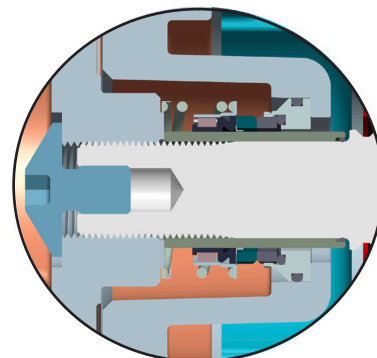

## WSP8A • Size: 8" x 8" 200 x 200 mm

